

# IPEVO

EXPERIENCE OVER IP

## You are watching Kaleido™ R7

A new way to explore and discover digital photos



[www.ipevo.com](http://www.ipevo.com)

# Table of Contents

<b>Manual Version History</b>	<b>03</b>
<b>1. Getting Started</b>	<b>04</b>
1.1 What you need	04
1.2 Initial Setup	05
1.3 Re-entering Initial Setup	06
<b>2. How it Works – Three Ways to Enjoy Playing Your Photos</b>	<b>07</b>
2.1 Playing Live Channels	07
2.2 Playing My Gallery	07
2.3 Playing Card and Memory	08
<b>3. Using Kaleido R7 Remote Control</b>	<b>09</b>
3.1 Remote control overview	09
3.2 Remote control receiver position on Kaleido R7	10
3.3 Operations in the Menu mode	11
3.4 Enter/quit the Playback mode	18
<b>4. Basic Playback Features</b>	<b>20</b>
4.1 Change photo/text layout mode	20
4.2 Repeat all channels or a single channel	23
4.3 Refresh the channel (Live Channels)	23
4.4 Jump to your favorite My Gallery channel and play it	24
4.5 Go to the source page of the currently displayed photo (Live Channels)	24
4.6 Move to the previous or next channel	25
4.7 Go to the previous or next photo	25
4.8 Set Kaleido R7 to standby mode	26
4.9 About PC LINK/OFFLINE status	27
<b>5. Advanced Playback Features</b>	<b>28</b>
5.1 Playback options in the Settings menu	28
5.2 Zoom mode	29
5.3 Date information	31
5.4 Autoplay when PC LINK	32
5.5 Playback order	33
<b>6. Extra Features and Settings</b>	<b>34</b>
6.1 Change wireless network settings	34
6.2 Reconnect current wireless network	35
6.3 Automatically standby and wake up Kaleido R7	36
6.4 Update firmware	37
6.5 Reset settings	37
6.6 Reformat internal memory	38
<b>7. Useful Tips for Kaleido R7</b>	<b>39</b>
7.1 Replace remote control battery	39
7.2 Plug/unplug memory card	40
7.3 Subscribe Live Channels and synchronize My Gallery	40
7.4 Supported memory device and photo format	41
<b>8. FAQ and Troubleshooting</b>	<b>42</b>

# Manual Version History

Version	Date	Details
V1.0.RM.E	March 1st, 2009	<ul style="list-style-type: none"><li>• First official release version</li><li>• Corresponding to Kaleido R7 V02.00.04.69 ~</li></ul>
V1.1.RM.E	July 6th, 2009	<ul style="list-style-type: none"><li>• Added new chapters: 4.9, 5.4, 5.5, 6.6, 7.4</li><li>• Corresponding to Kaleido R7 V02.00.05.16 ~</li></ul>

# 1. Getting Started

## 1.1 What you need

To start using your Kaleido R7, you need the following items:

### Hardware

---

#### PC:

- 2GHz and above CPU (Dual-core CPU recommended)
- 1GB RAM
- 550MB free hard disk space

#### Mac:

- 1.5GHz and above CPU (Intel processor recommended)
- 1GB RAM
- 50MB free hard disk space

### Software

---

#### PC:

Microsoft Windows XP (Home or Professional edition) or Vista (32-bit)

#### Mac:

Mac OS X 10.5~10.6

#### EyeStage software:

Included in the CD-ROM or download from [www.ipevo.com](http://www.ipevo.com)

#### Network environment:


- Broadband Internet access (Cable or DSL)
- Wireless router (with support for 802.11b or 802.11g)\*
- Access to wireless network (i.e. password if you have one)

\* In general, wireless routers that are specified as 802.11N should be backward compatible. However, this is not always the case, and you should refer to the relevant sections in the user manual or specifications of the router to ensure that it is compatible with 802.11b or 802.11g standards.


#### Note for Network environment:

Kaleido R7 will only recognize computers in the same (wireless) network. In other words, both the computer and Kaleido R7 must be connected to the same wireless network access point. It could be one of the following scenarios:

## #1. The computer wirelessly connects to the wireless router

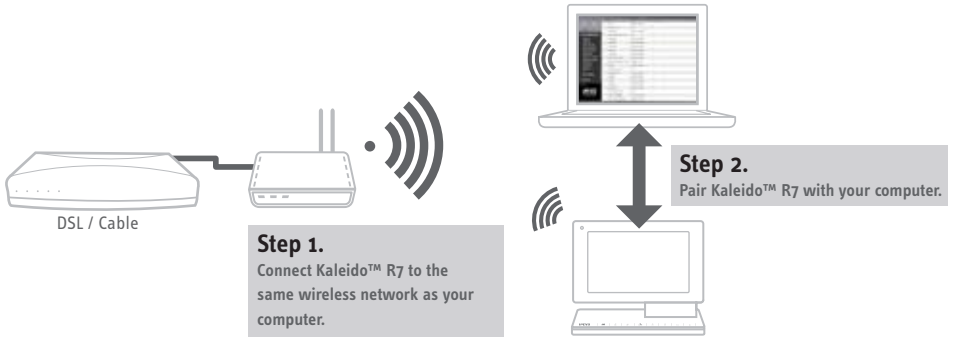

## #2. The computer connects to the wireless router using wired Ethernet

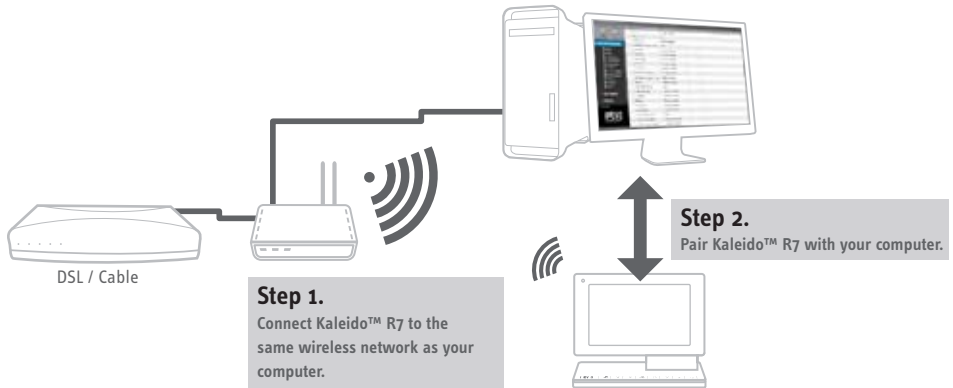

## 1.2 Initial Setup

Before using EyeStage, make sure the Initial Setup is completed, which means:



1. Kaleido R7 is connected to a wireless router
2. EyeStage is installed in your computer
3. Kaleido R7 and EyeStage are paired

For details, refer to the Quick Start Guide which is in Kaleido R7 package or downloadable from [www.ipevo.com](http://www.ipevo.com).

### 1.3 Re-entering Initial Setup

If the Initial Setup described above is not completed when you turn Kaleido R7 on, you may start the process again through these steps:

1. Reset all settings in Kaleido R7 by activating the following menu item:  
Settings > Reset Settings > All Settings
2. Power Kaleido R7 off, wait for a few seconds, then power it on again.
3. Kaleido R7 will enter Initial Setup.

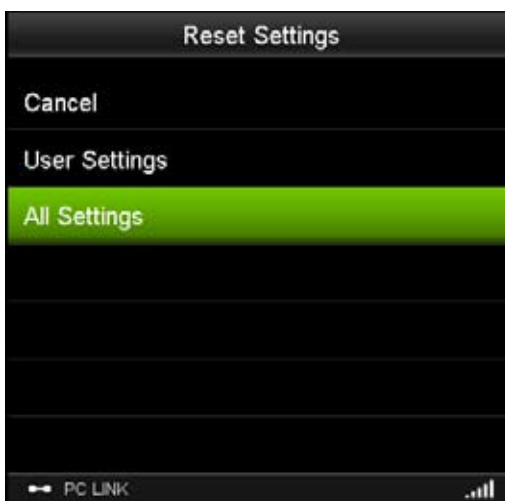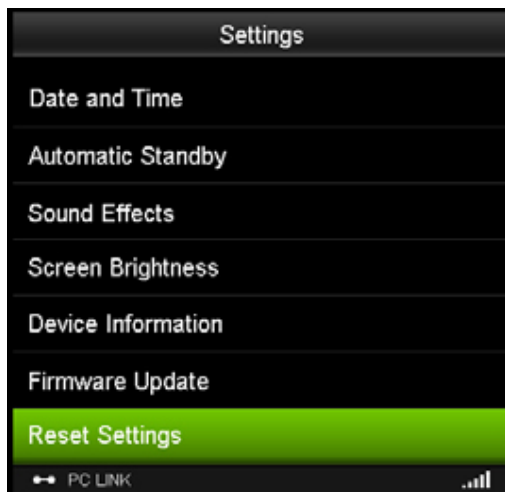


## 2. How it Works – Three Ways to Enjoy Playing Your Photos

Three outstanding feature combine together to make a ‘one of a kind’ digital frame.

- Live Channels – capture, stream, and play photos live
- My Gallery – synchronize photos to Kaleido R7 and play locally
- Card and Memory – enjoy photos in your memory device

### 2.1 Playing Live Channels

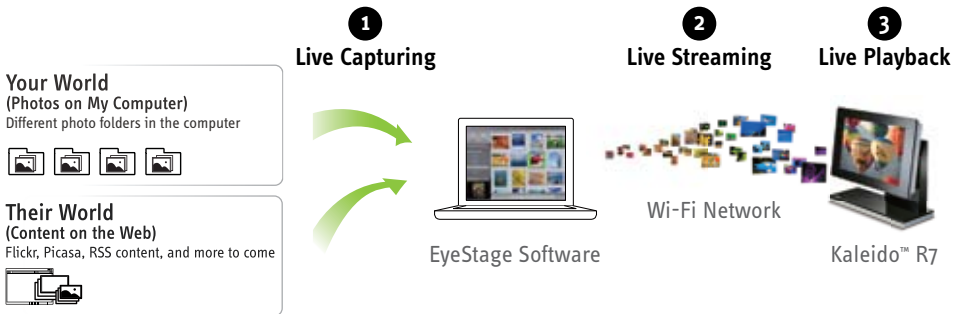


- 1. Live capturing:** EyeStage captures photos in your computer or from the Web on the fly.
- 2. Live streaming:** EyeStage streams captured photos to the paired Kaleido R7.
- 3. Live playback:** Kaleido R7 plays the streamed photos live.

\* In Live Channels, the computer must be switched on and running EyeStage.

### 2.2 Playing My Gallery

#### 1. Download photos to EyeStage:

Download photos from your computer or the Web into My Gallery in EyeStage.

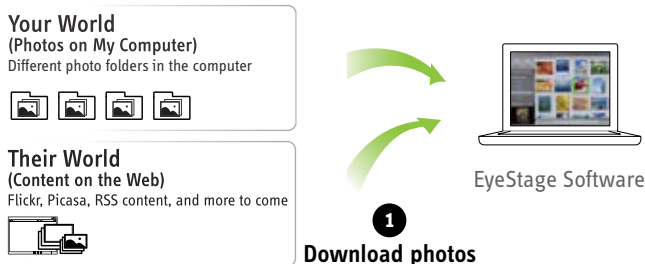

## 2. Sync to Kaleido R7:

Synchronize EyeStage with Kaleido R7 and store the downloaded photos into Kaleido R7.




## 3. Play photos from Kaleido R7 :

Play the synced photos from Kaleido R7. No computer is required.



## 2.3 Playing Card and Memory


Insert any memory card (SD, SDHC, MMC, MS) or USB flash disk into Kaleido R7 to enjoy stored contents. No computer is required.

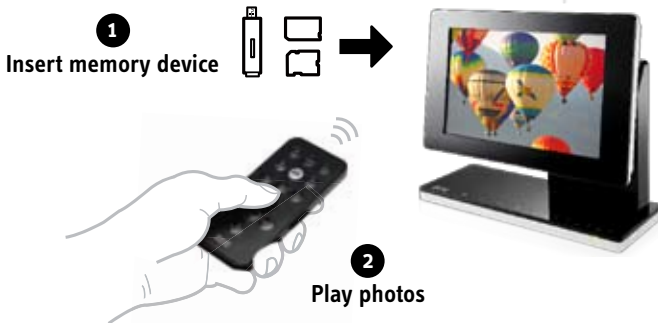

# 3. Using Kaleido R7 Remote Control

## 3.1 Remote control overview

The remote control provides instant access to settings and for navigating through contents.

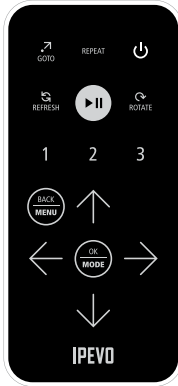


All Menu items on Kaleido™ R7 can be accessed using the (OK/MODE), and (BACK/MENU) keys on the remote control.

Symbol	Key	Description
	<b>GoTo</b>	In playback mode, the photo source (file location or URL) opens in a new window on your computer monitor.
	<b>Repeat</b>	Repeats current channel or repeats all channels.
	<b>Standby</b>	Activates standby mode (screen switches off, device remains on).
	<b>Refresh</b>	Refreshes the contents of the current channel/ Starts showing photos from the 1st picture.
	<b>Play/Pause</b>	Plays photo or pauses playback.
	<b>Rotate</b>	Rotates the photo 90° clockwise.
	<b>Shortcut</b>	Jumps to each of user-defined channels.
	<b>Back / Menu</b>	Returns to the previous menu / Cancels playback.
	<b>Up / Channel Up</b>	Moves to the previous menu item / Switches to the previous channel.
	<b>Previous</b>	Goes to previous photos / views.
	<b>OK / Mode</b>	Confirms/accepts the current selection / Toggles the display layout mode during playback.
	<b>Next</b>	Goes to next photos / views.
	<b>Down / Channel Down</b>	Moves to the next menu item / Switches to the next channel.

### 3.2 Remote control receiver position on Kaleido R7



The location of the remote control receiver is shown below. For the best response, point the control directly to the receiver, ensuring a clear line of sight between the remote control and Kaleido R7.

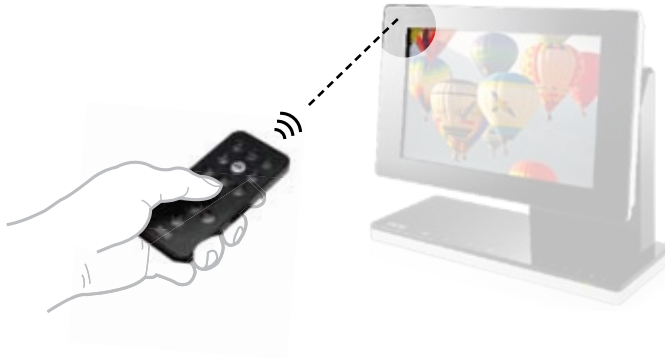

### 3.3 Operations in the Menu mode



To: Navigate menu items

Press: Up key  or Down key 

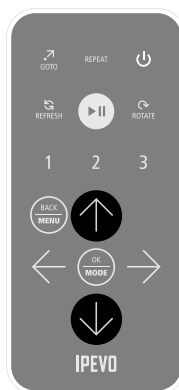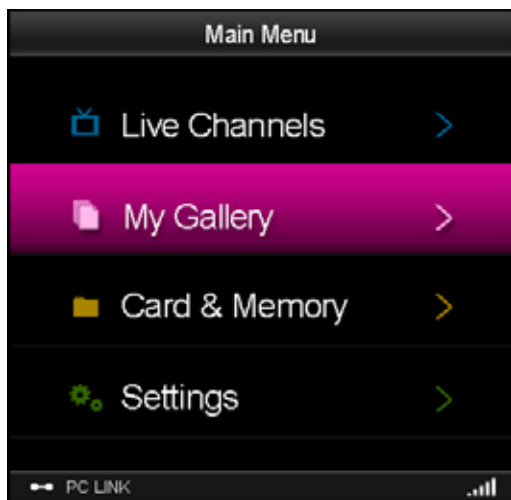



To: Select a menu item

Press: OK key  (OK/MODE)

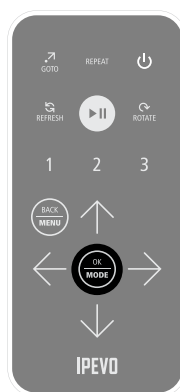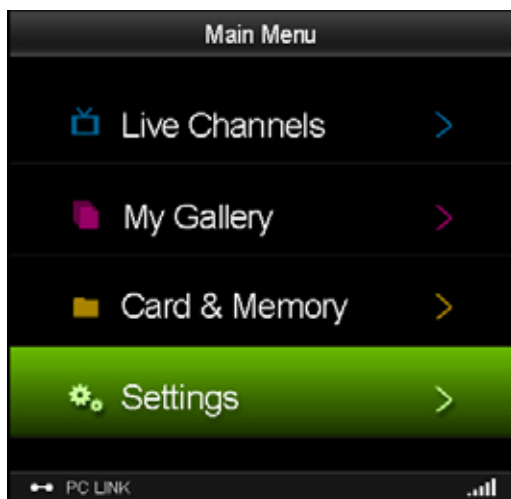


To: Return to the previous menu

Press: Back key  (BACK/MENU)

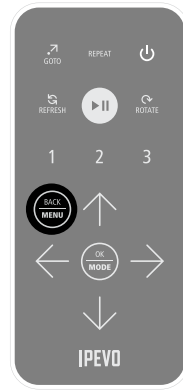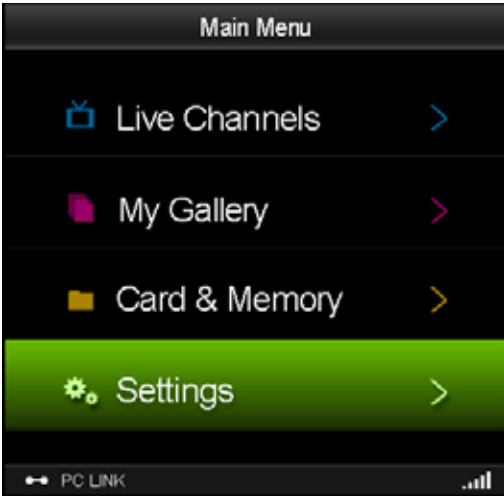



**To:** Enter characters

1. Use     to highlight a character.

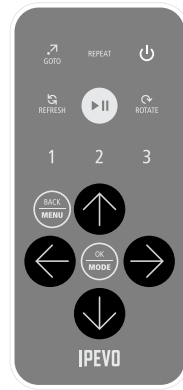


2. Press  (OK/MODE) to input the highlighted character.

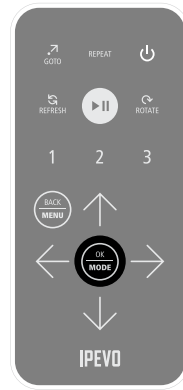



 = Windows: Backspace / Mac: Delete




 = Windows: Backspace / Mac: Delete

3. To delete the last character, highlight  and press  (OK/MODE).

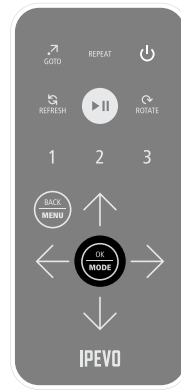



 = Windows: Backspace / Mac: Delete



 = Windows: Backspace / Mac: Delete


4. To complete entering characters, highlight **OK** and press **OK/MODE** (OK/MODE).

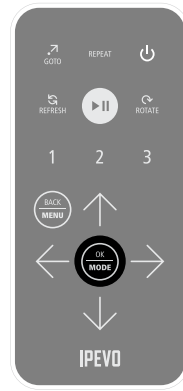


 = Windows: Backspace / Mac: Delete


### 3.4 Enter/quit the Playback mode


**To:** Enter Playback mode and start playing

In the Menu mode, you may move the cursor to any location (except for Settings) and press the Play key  to start playing.

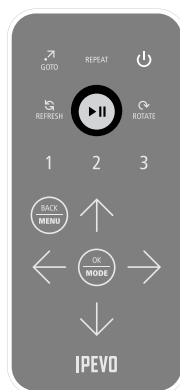

## To: Quit the Playback mode

Anytime you want to quit playback, press the Menu key  (BACK/MENU). Kaleido R7 will return to the Menu mode.

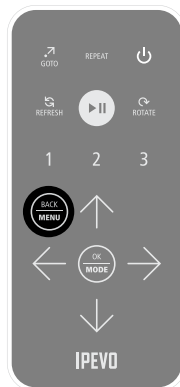


# 4. Basic Playback Features

Kaleido R7 offers various playback features to provide you with an enjoyable and convenient photo viewing experience.

## 4.1 Change photo/text layout mode

Photos posted on the Web are often accompanied by detailed descriptions from the owner. View descriptions, channel name, album title, and other information by switching between different layout modes in Kaleido R7.

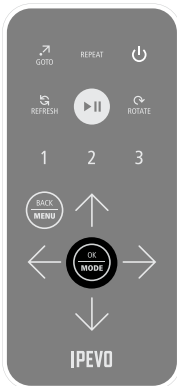

### How:

During playback, press the Mode key (OK/MODE) to switch among four\* layout modes.

\* Some channel sources have fewer modes; for example, Info-oriented RSS channel has only one.

Mode 1





roy(ce)'s Flickr Photos...



Cars

- Flickr


'67 Jaguar E-Type fix  
head coupe at Stanley  
Park in Vancouver

11/23

5/4/2008 7:00 AM

## 4.2 Repeat all channels or a single channel

You may repeat playing all channels or repeat playing a single channel. The latter is useful when you want to enjoy your favorite channel for a certain period of time.

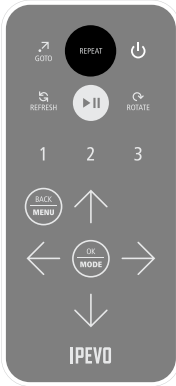


### How:

- Live Channels: During playback, press the Repeat key (REPEAT) to switch between Repeat All (repeat all) or Repeat Channel (repeat).
- My Gallery / Card and Memory: When in the Menu mode, press (REPEAT) to switch between Repeat All (repeat all) or Repeat Channel (repeat). You cannot change the Repeat mode while photos are being played.

## 4.3 Refresh the channel (Live Channels)

You may refresh the channel to get the latest content. It is useful for channels that are frequently updated, such as news RSS.

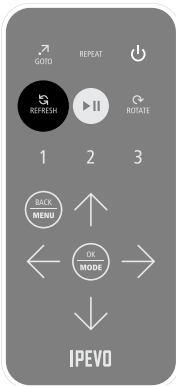


### How:

During Live Channels playback, press the Refresh key (REFRESH). Kaleido R7 will refresh the channel content and then restart playing from the 1st photo.

## 4.4 Jump to your favorite My Gallery channels and play it

You may jump to your favorite channel in My Gallery and start playing it by pressing one of the three Shortcut keys, (1)(2)(3).

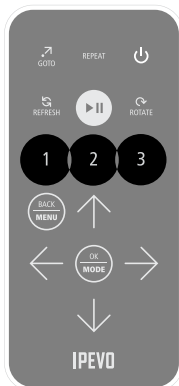


### How:

1. During playback or when in the main menu, press one of the Shortcut keys, for example (1).
2. If the shortcut channel is not programmed yet, the setting menu appears.
3. Select CH1 and press (OK/MODE). The list of channels\* will appear.
4. Select a channel and press (OK/MODE) again. Shortcut key (1) is now programmed.
5. Start playing the photos again. When you press (1), Kaleido R7 will automatically jump to the programmed channel and start playing it.

\* You need to have at least one channel to use the Shortcut keys.

## 4.5 Go to the source page of the currently displayed photo (Live Channels)

Ever feel like you're missing the best part of an image, the important part of a story? The Goto function opens up a new browser window on your computer and points you directly to the source of the content.

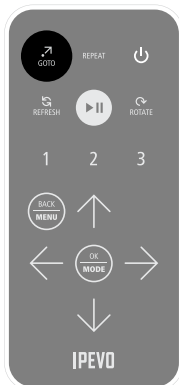

### How:

1. During Live Channels playback, press the Goto key (GOTO).
2. The web browser on your computer will open a new window or tab and show the source page of the currently displayed photo.
3. If the photo source is your local computer, the file manager will open a folder showing the location of the photo.



































